



1555

DOUBLE-HUNG

1555 Vinyl Double-Hung Window

The 1555 vinyl double-hung replacement window combines superior design with traditional craftsmanship and style. Features like aesthetically beveled sashes and a welded sloped sill complement energy-efficient design options such as insulated dual-pane glass and heavy-duty weatherstripping, adding enhanced performance and instant curb appeal for any home.

PERFORMANCE FEATURES

- Warm-edge spacer system maximizes energy efficiency and improves seal performance of insulated glass units
- Interlocking sashes help reduce air infiltration
- Metal-reinforced meeting rail delivers strength and durability
- True sloping sill optimizes water drainage and eliminates unsightly weep holes
- Inverted-coil balances with detent clip prevent sash from drifting, and provide smoother operation and lower operating force

Welded multi-chamber mainframe design

3 1/4" frame depth

Dual-pane insulated glass



Designed smarter, from the inside out

ENGINEERED TO PERFORM

- Multi-chamber mainframe design
- 3 1/4" frame depth
- 3/4" dual-pane insulated glass
- Continuous head and sill mulling for twins and triples
- Finless frame
- Wood extension jambs available for 4 9/16" and 6 9/16" wall depths

CONVENIENCE & STYLE

The 1555 features the following design details on every window:

- Mortised recessed locks
- Beveled exterior profile
- Tilt-in sashes
- Integral lift rails

ENERGY-EFFICIENT FEATURES

Our **dual-pane** insulated glass package options help save on heating and cooling costs while enhancing home comfort

- In cool weather**, insulated glass provides outstanding thermal performance to keep interior glass surfaces closer to room temperature, eliminating cold spots near windows
- In warm weather**, it helps reduce solar heat gain and minimize glare to improve interior comfort
- Able to meet **ENERGY STAR**® requirements in all four climate zones

GLAZING TYPE	U-VALUE	SHGC
Argon and Low-E glass	0.27	0.29
Argon and Low-E glass with grids	0.27	0.26
Argon and Low-E DSB glass	0.27	0.29
Argon and Low-E DSB glass with grids	0.27	0.26
Argon and HP Low-E glass	0.27	0.21
Argon and HP Low-E glass with grids	0.27	0.19

Note: all values based on standard 3/4" dual-pane IGU unless noted otherwise



SAFETY & SECURITY FEATURES

- Dual-opposing locks create a stronger, safer seal
- Push-button vent latches keep the window secure even when partially opened, providing ventilation without sacrificing safety and security
- Optional tempered glass is four times stronger than non-tempered glass and safer if broken
- Optional obscure glass allows light in while protecting privacy
- Optional Window Operating Control Device (WOCD) restricts sash opening and reduces the risk of accidental falls

MIN & MAX SIZING

WIDTH		HEIGHT	
Min	Max	Min	Max
15"	17"	28"	84"
17 1/4"	52"	23 1/2"	60"

CHS MAX SIZES	
WIDTH	HEIGHT
Twin (Individual) 37 3/4"	77" high
Twin (Overall) 75 5/8"	
Triple (Individual) 37 3/4"	
Triple (Overall) 113 1/2"	


* Available in 1/8" increments. DP upgrade required for any unit greater than 84" tall. Available CHS configurations are XX and XXX. 1555 Picture Window is not available with CHS.

CREATE A CUSTOMIZED LOOK

GRID TYPES & SIZES


- 5/8" flat grids-between-the-glass
- 1 1/16" sculptured grids-between-the-glass

GRID PATTERNS

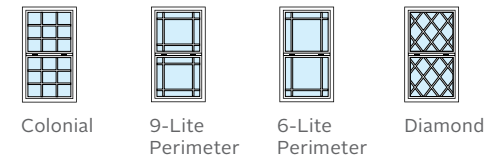

VINYL/EXTRUDED COLORS





OUR MISSION

Getting It Right Every Time

We build each of our products the same way we built our company: with integrity and precision. Every MI window and door is handcrafted in the United States using state-of-the-art manufacturing techniques, and is backed by vigorous in-house testing procedures. We are 100% committed to offering the styles, value, and performance you're after.

Discover everything we have to offer at miwindows.com, or by calling 1-717-365-3300.